


# JM HD3

TECHNICAL SPECIFICATIONS

# HD3: Robust & flexible

JM HD3 is an ROV system designed to handle cold waters and demanding environments. This is a proper underwater tractor that can withstand use in the most demanding conditions along the coast. It has a depth capacity down to 300 meters, and comes with 3Kw Topside Power System with ground fault monitoring. JM HD3 is robust, flexible and prepared for DVL, sonar and underwater positioning.

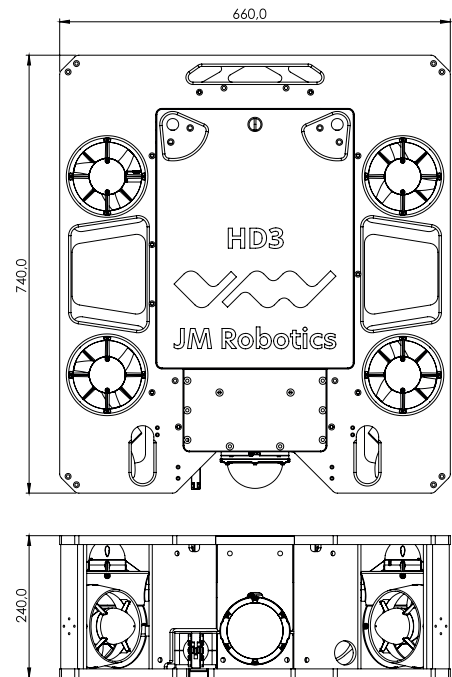

## PHYSICAL

Length	740 mm
Width	660 mm
Height	240 mm (without sensors)
Weight in air w/ ballast	36 kg
Weight in air w/ ballast	38 kg
Construction frame	HDPE plastic
Electronics enclosure	4" series aluminium
Power supply	3" series aluminium
Buoyancy	Rated to 488 m
Ballast weight	6 x 200 g stainless steel

## PERFORMANCE

Maximum rated depth	300 msw
Maximum forward speed	2 m/s – 4 knots
Thrusters	T500 with connectors
Thrusters configuration	8 thrusters: • 4 vectored • 4 vertical
Forward bollard thrust	35 kgf
Vertical bollard thrust	50 kgf
Lateral bollard thrust	35 kgf

## CAMERA

Camera	1080p HD, low-light
Camera field of view	110° horizontally
Tilt servo: range	+/- 90 degrees
Focus	Manual

## LIGHTS

12 000 Lumens total	
Brightness	8 x 1500 lumens
Light beam angle	135°

## EXTERNAL INTERFACE

2 AUX Input and 24V w/ USB and Ethernet
---

## SENSORS

3-DOF gyroscope
3-DOF accelerometer
3-DOF magnetometer
Internal temperature sensor
Bar30 pressure/depth & temperature sensors, external
Current and voltage sensing
Leak detection

## POWER SUPPLY

Length / width / height	420 mm / 480 mm / 220 mm
Weight	11.5 kg
Input voltage	180-240 VC, 50-60 Hz
Input current max (fuse)	16 A
Output voltage	400 VDC
Output current max	7.5 A
Output power max	3000 W
Operating temperature	-20°C to 60°C
Humidity	20-90% RH non-condensating
Safety	Auto ground failure detection
IP ratings	IP20 (waterproof case)

## TETHER

Sheath colour	Yellow
Diameter	13 mm
Buoyancy in salt water	Neutral
Working strength	150 kg
Breaking strength	Min 230 kg
Max voltage power conductors	1 kVolts
Max voltage data conductors	600 volts
Static bending radius	>5 x outer diameter
Dynamic bending radius	>12 x outer diameter

## BOTH ROV AND POWER SUPPLY COME WITH REMOTE SUPPORT!

JM Remote-support is pre-installed on ROV and topside power supply. With Remote support we can troubleshoot, update, and maintain your ROV system. ROV is prepared with 2 x auxiliary for extra equipment (USB and Ethernet 12V and optional serial data).